

## MULTI LAMPS LED BULB

### Data Sheet

**Description:**

These multi lamps LED Bulbs are specifically designed for flashlight electric equipment, indicator light switch and where a wide view angle. The 5mm round shaped radiation pattern (50°) and high luminous intensity ensure that these devices are excellent for wide field of view outdoor applications where a wide viewing angle and readability in sunlight are essential.

High efficiency LED materials are used in this Bulb. Every lamp is made with an advanced optical grade epoxy offering superior high shock and high temperature resistance in outdoor applications.

**Feature:**

- Wide view angle
- High luminous output
- Seven kind color
- Solid-state Vibration resistant
- Saving power
- Long life

**Option:**

- 6V to 240V AC or DC
- Other industry standard base

***A-BRIGHT***


A-BRIGHT INDUSTRIAL CO.,LTD.

---

**Part No.: AB-1851B0-14VD-B3G-0**

**Multi Lamps LED Bulb**

**PACKAGE DIMENSIONS:**

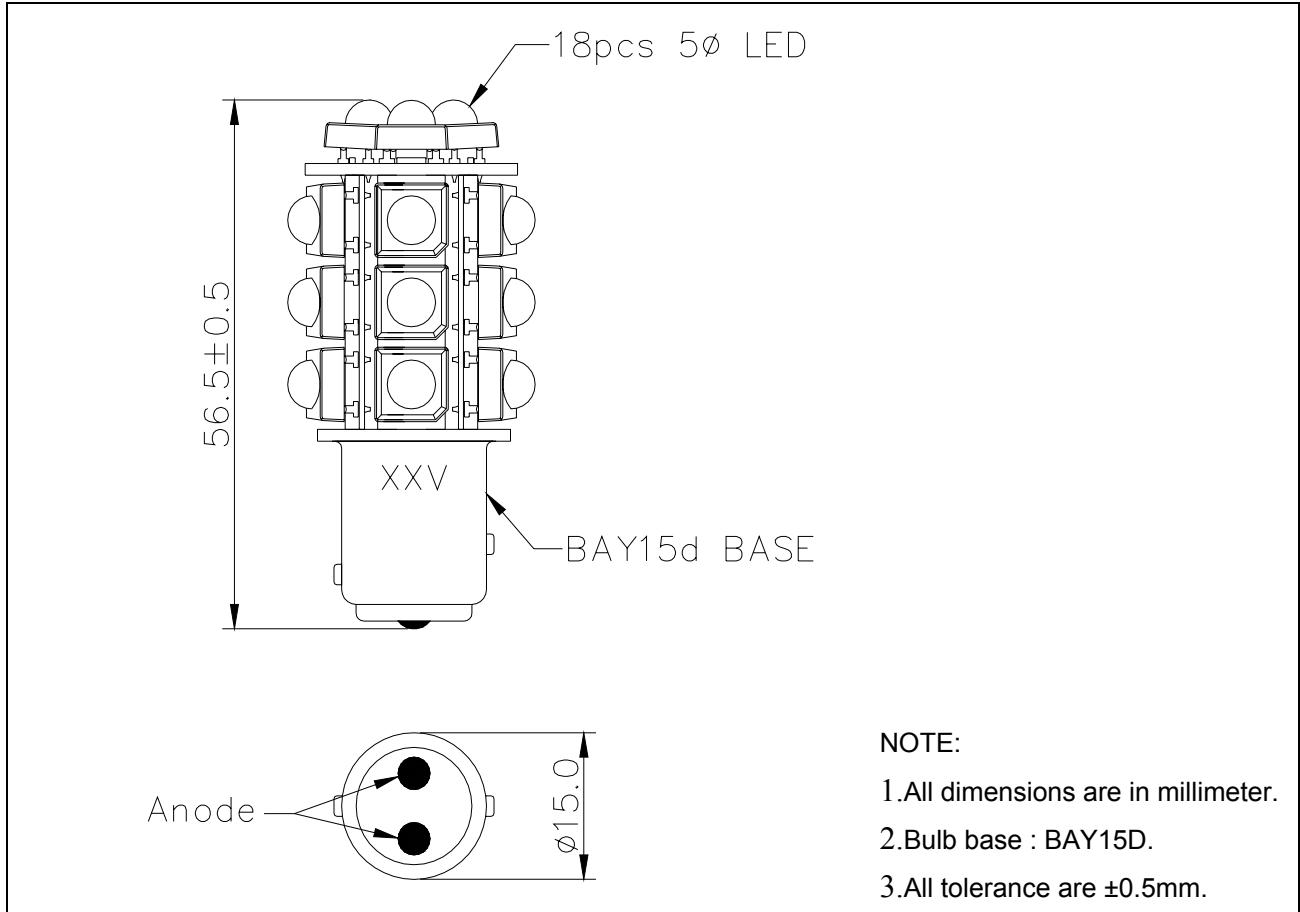

**NOTE:**

- 1. All dimensions are in millimeter.
- 2. Bulb base : BAY15D.
- 3. All tolerance are  $\pm 0.5$ mm.

**Part No.: AB-1851B0-14VD-B3G-0**

**Multi Lamps LED Bulb**

**FEATURE:**

- SUPER LUMINOSITY BLUE LED (InGaN).
- WATER CLEAR PACKAGE.
- 5mm ALL RESIN MOLD.
- WIDE VIEWING ANGLE.
- BASE MODEL BAY15D.
- ELECTRIC DC.

**ABSOLUTE MAXIMUM RATING: Ta = 25 °C**

- PEAK OPERATE VOLTAGE..... 16.8 V
- OPERATING TEMPERATURE..... -25 TO +85°C
- STORAGE TEMPERATURE..... -35 TO +100°C
- LED BULB LIFE..... 200000 HOURS  
(LUMINANCE REDUCES to 50%)

**ABSOLUTE OPTICAL CHARACTERISTIC (Ta= 25°C)**

PARAMETER		SYMBOL	MIN	TYP	MAX	UNIT
Operate Voltage		V	----	14	16	V
Luminous Intensity	IF= 160 mA	Iv	25	29	----	cd
	IF= 370 mA		48	55	----	
Dominant Wavelength	IF= 160 mA	λd	----	470	----	nm
Spectrum Radiation Bandwidth	IF= 160 mA	Δλ	----	20	----	nm
Forward Current	VIN=14 V DC	IF	----	160	----	mA
Viewing Angle		2θ1/2	----	50	----	deg