


A-BRIGHT A-BRIGHT INDUSTRIAL CO., LTD. SURFACE MOUNT LED LAMPS


Power Warm White Surface Mount Device

Part Number: 62-217ASW2C2H


Package outlines & Re-flow Profile

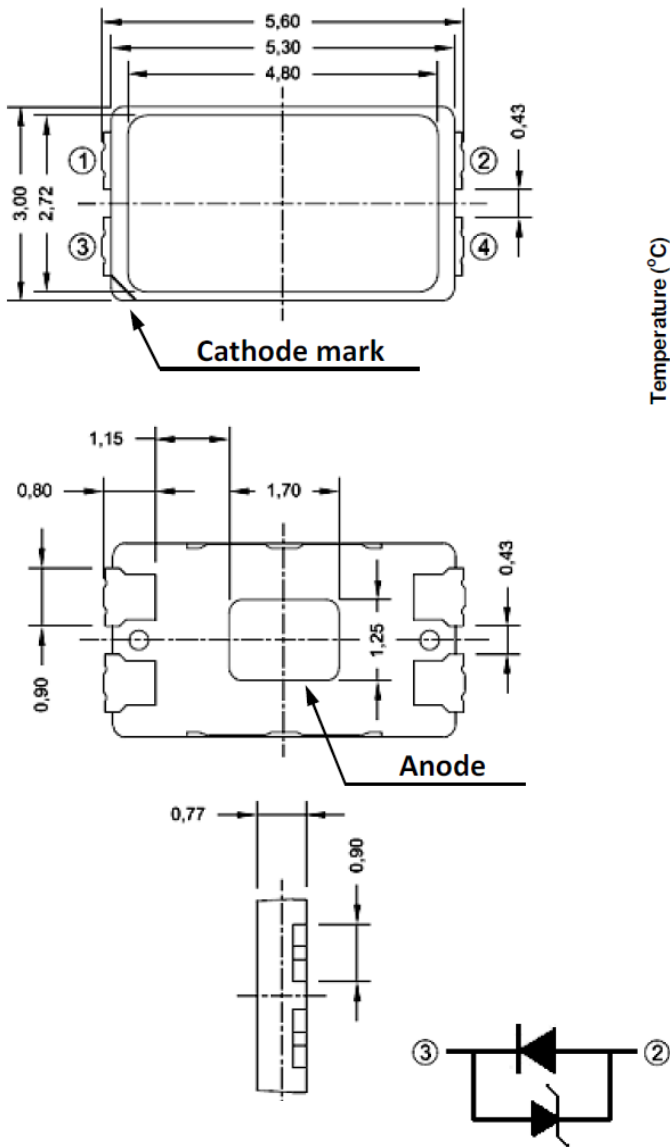

For Reflow Soldering

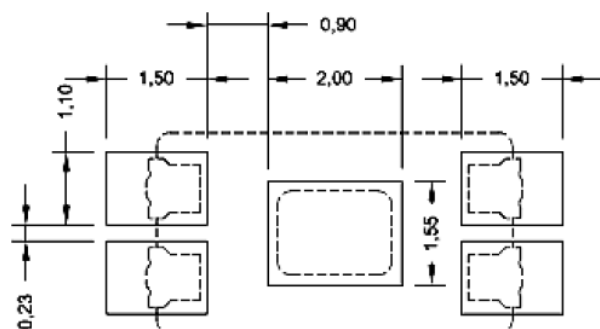

Reflow Temp/Time

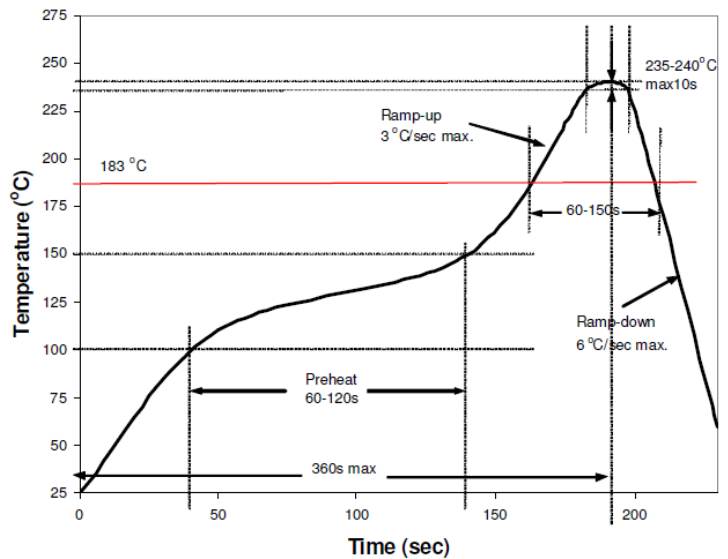

Soldering iron

Basic spec is ≤ 5 sec when 260 °C. If temperature is higher, time should be shorter (+10 °C \rightarrow -1sec). Power dissipation of iron should be smaller than 15W, and temperatures should be controllable. Surface temperature of the device should be under 230 °C.

ITEM	MATERIALS
Resin (mold)	Epoxy
Lens color	Yellow Diffused
Printed circuit board	BT
Emitted color	Warm White
Material	InGaN

NOTES:

1. All dimensions are in millimeters (inches);
2. Tolerances are ± 0.1 mm (0.004inch) unless otherwise noted.
3. Polarity referring onto the cathode mark is reversed on the red.

A-BRIGHT A-BRIGHT INDUSTRIAL CO., LTD.
SURFACE MOUNT LED LAMPS

Part Number: 62-217ASW2C2H

ELECTRO-OPTICAL CHARACTERISTICS (T_A=25°C)

Parameter	Test Condition	Symbol	Value			Unit
			MIN.	TYP.	MAX.	
Viewing angle at 50% I _v	I _F =120mA	2θ 1/2	120			Deg
Forward voltage	I _F =120mA	V _F	2.9	3.1	3.6	V
Correlated Color Temperature	I _F =120mA	CCT	2600	---	3700	K
Color Rendering Index	I _F =120mA	CRI	---	80	---	---
Pulse Forward Current (Pulse Width ≤ 10msec, and duty ≤ 1/10)	I _F =120mA	I _{FP}	360			mA

Absolute maximum ratings (T_A=25°C)

Parameter	Symbol	Value	Unit
Forward current	I _F	180	mA
Reverse voltage	V _R	5	V
Power dissipation	P _D	0.65	W
Operating temperature range	Top	-40 ~+85	°C
Storage temperature range	Tstg	-40 ~+100	°C

A-BRIGHT A-BRIGHT INDUSTRIAL CO., LTD.
SURFACE MOUNT LED LAMPS

Part Number: 62-217ASW2C2H

Bin Range

V _F Rank	Condition	Min.	Max.
1	I _F = 120 mA	2.9	3.0
2		3.0	3.1
3		3.1	3.2
4		3.2	3.3
5		3.3	3.4
6		3.4	3.5
7		3.5	3.6
Luminous Flux Rank	Condition	Min.	Max.
VI	I _F = 120 mA	36	40.5
VJ		40.5	45
VK		45	49.5
VL		49.5	54

SURFACE MOUNT LED LAMPS

Part Number: 62-217ASW2C2H

Bin Range

2700K						3000K					
Rank	CIE X	CIE Y	Rank	CIE X	CIE Y	Rank	CIE X	CIE Y	Rank	CIE X	CIE Y
V271	0.4515	0.4168	X271	0.4636	0.4197	R301	0.4299	0.4165	T301	0.4431	0.4213
	0.4562	0.426		0.4688	0.429		0.4261	0.4077		0.4388	0.4123
	0.4625	0.4275		0.475	0.4304		0.4324	0.41		0.4451	0.4146
	0.4576	0.4182		0.4697	0.4211		0.4365	0.4189		0.4496	0.4236
V272	0.4467	0.4076	X272	0.4585	0.4104	R302	0.4261	0.4077	T302	0.4388	0.4123
	0.4515	0.4168		0.4636	0.4197		0.4223	0.399		0.4345	0.4033
	0.4576	0.4182		0.4697	0.4211		0.4284	0.4011		0.4406	0.4055
	0.4526	0.409		0.4644	0.4118		0.4324	0.41		0.4451	0.4146
V273	0.442	0.3985	X273	0.4534	0.4011	R303	0.4223	0.399	T303	0.4345	0.4033
	0.4467	0.4076		0.4585	0.4104		0.4185	0.3902		0.4303	0.3943
	0.4526	0.409		0.4644	0.4118		0.4244	0.3923		0.4361	0.3964
	0.4477	0.3998		0.4591	0.4024		0.4284	0.4011		0.4406	0.4055
V274	0.4373	0.3893	X274	0.4483	0.3918	R304	0.4185	0.3902	T304	0.4303	0.3943
	0.442	0.3985		0.4534	0.4011		0.4147	0.3814		0.426	0.3854
	0.4477	0.3998		0.4591	0.4024		0.4204	0.3834		0.4317	0.3873
	0.4428	0.3906		0.4538	0.3931		0.4244	0.3923		0.4361	0.3964
W271	0.4576	0.4182	Y271	0.4697	0.4211	S301	0.4365	0.4189	U301	0.4496	0.4236
	0.4625	0.4275		0.475	0.4304		0.4324	0.41		0.4451	0.4146
	0.4688	0.429		0.4813	0.4319		0.4388	0.4123		0.4515	0.4168
	0.4636	0.4197		0.4758	0.4225		0.4431	0.4213		0.4562	0.426
W272	0.4526	0.409	Y272	0.4644	0.4118	S302	0.4324	0.41	U302	0.4451	0.4146
	0.4576	0.4182		0.4697	0.4211		0.4284	0.4011		0.4406	0.4055
	0.4636	0.4197		0.4758	0.4225		0.4345	0.4033		0.4468	0.4077
	0.4585	0.4104		0.4703	0.4132		0.4388	0.4123		0.4515	0.4168
W273	0.4477	0.3998	Y273	0.4591	0.4024	S303	0.4284	0.4011	U303	0.4406	0.4055
	0.4526	0.409		0.4644	0.4118		0.4244	0.3923		0.4361	0.3964
	0.4585	0.4104		0.4703	0.4132		0.4303	0.3943		0.442	0.3985
	0.4534	0.4011		0.4648	0.4038		0.4345	0.4033		0.4468	0.4077
W274	0.4428	0.3906	Y274	0.4538	0.3931	S304	0.4244	0.3923	U304	0.4361	0.3964
	0.4477	0.3998		0.4591	0.4024		0.4204	0.3834		0.4317	0.3873
	0.4534	0.4011		0.4648	0.4038		0.426	0.3854		0.4373	0.3893
	0.4483	0.3918		0.4593	0.3944		0.4303	0.3943		0.442	0.3985

A-BRIGHT A-BRIGHT INDUSTRIAL CO., LTD.
SURFACE MOUNT LED LAMPS

Part Number: 62-217ASW2C2H

Bin Range

3500K					
Rank	CIE X	CIE Y	Rank	CIE X	CIE Y
O352	0.3996	0.4015	P354	0.4016	0.3843
	0.396	0.3907		0.3975	0.3731
	0.4056	0.3954		0.4061	0.3773
	0.4097	0.4065		0.4107	0.3887
O353	0.396	0.3907	Q352	0.4198	0.4115
	0.3925	0.3798		0.4152	0.4001
	0.4016	0.3843		0.4248	0.4048
	0.4056	0.3954		0.4299	0.4165
O354	0.3925	0.3798	Q353	0.4152	0.4001
	0.3889	0.369		0.4107	0.3887
	0.3975	0.3731		0.4198	0.3931
	0.4016	0.3843		0.4248	0.4048
P352	0.4097	0.4065	Q354	0.4107	0.3887
	0.4056	0.3954		0.4061	0.3773
	0.4152	0.4001		0.4147	0.3814
	0.4198	0.4115		0.4198	0.3931
P353	0.4056	0.3954			
	0.4016	0.3843			
	0.4107	0.3887			
	0.4152	0.4001			


Note:

- (1) Correlated color Temperature is derived from the CIE 1931 Chromaticity diagram
- (2) Measurement tolerance is ± 0.01
- (3) The luminous flux tolerance is $\pm 10\%$
- (4) The Forward Voltage tolerance is $\pm 0.1V$

A-BRIGHT A-BRIGHT INDUSTRIAL CO., LTD. **SURFACE MOUNT LED LAMPS**

Part Number: 62-217ASW2C2H







CIE Chromaticity Diagram

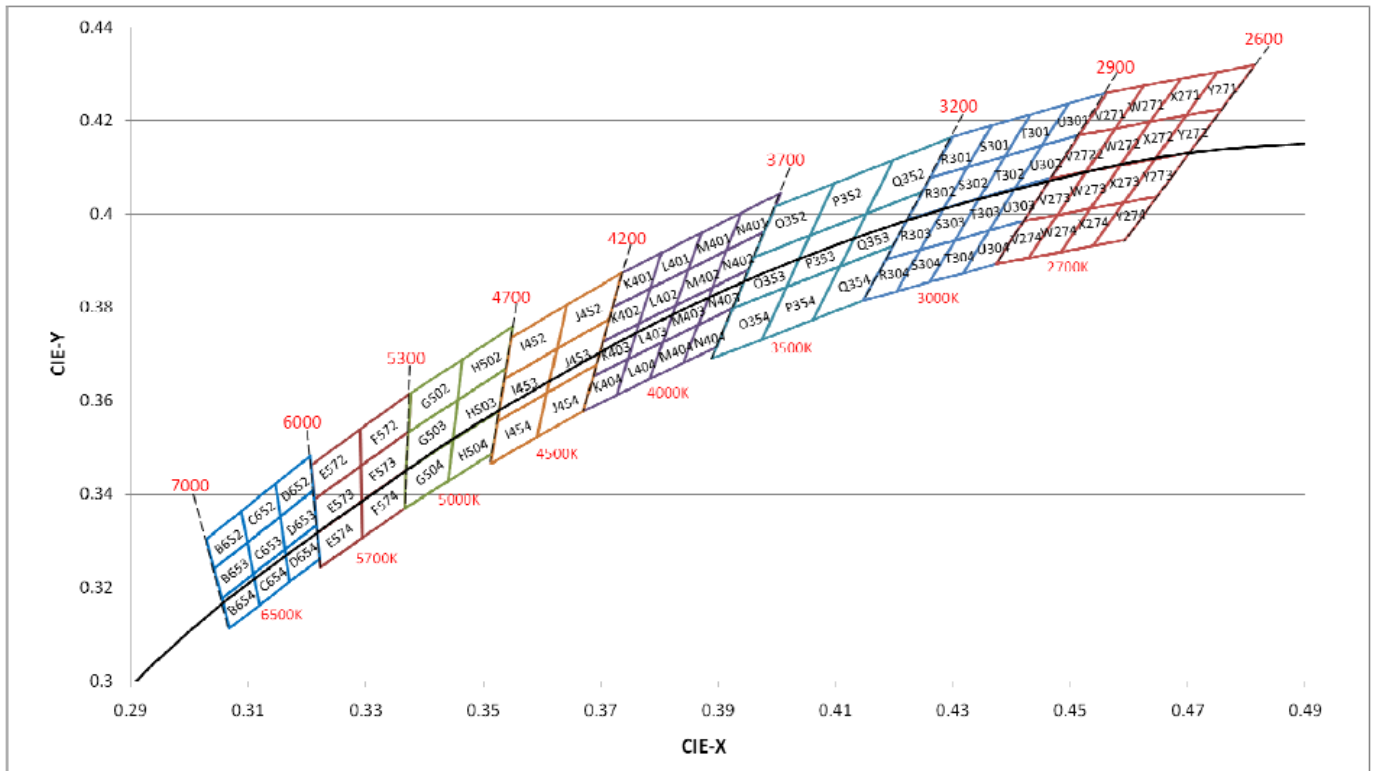

A-BRIGHT A-BRIGHT INDUSTRIAL CO., LTD. SURFACE MOUNT LED LAMPS

Part Number: 62-217ASW2C2H




Typical Electro-Optical Characteristic Curves

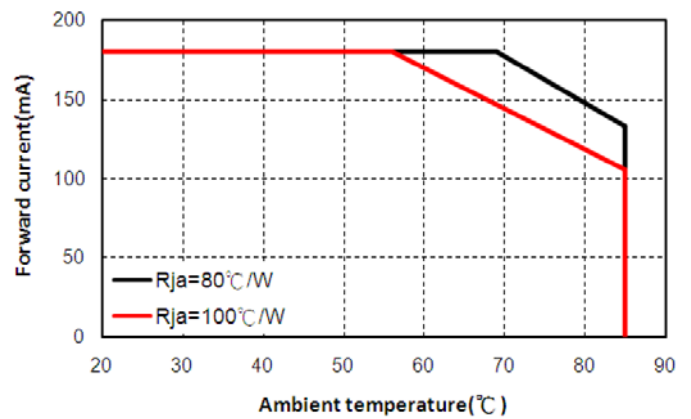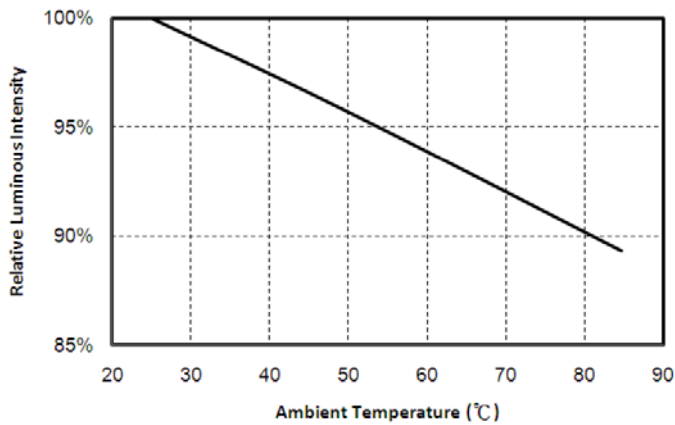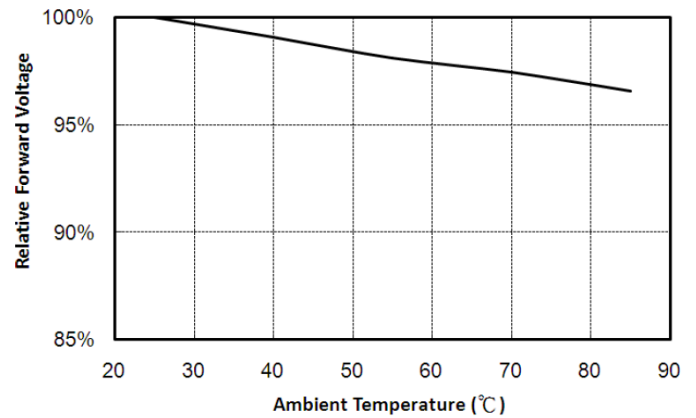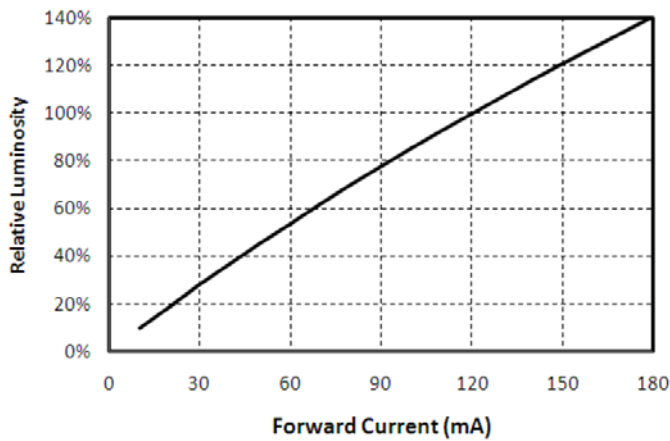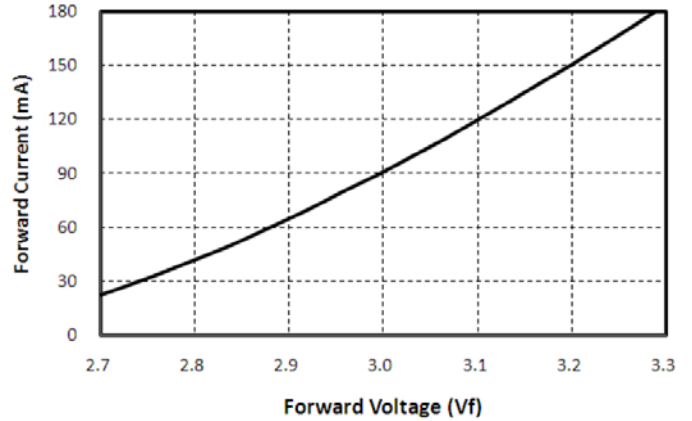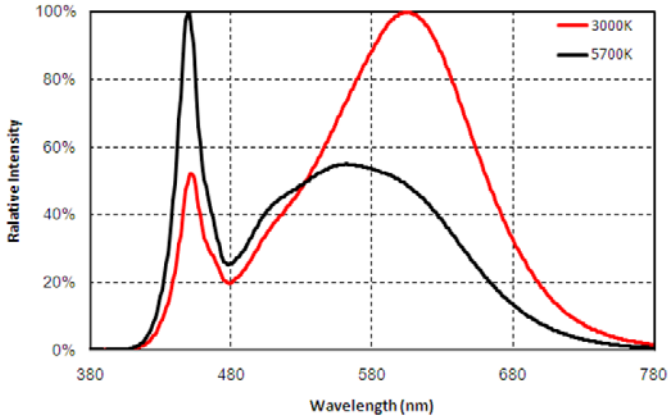

A-BRIGHT A-BRIGHT INDUSTRIAL CO., LTD.
SURFACE MOUNT LED LAMPS

Part Number: 62-217ASW2C2H

Typical Electro-Optical Characteristic Curves

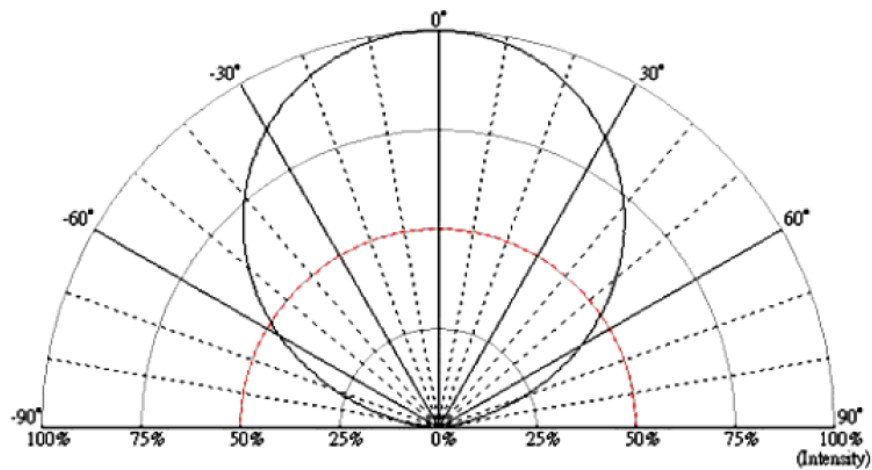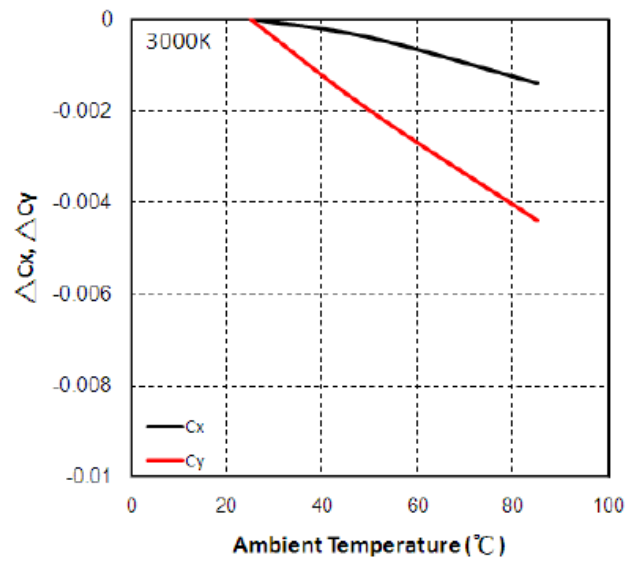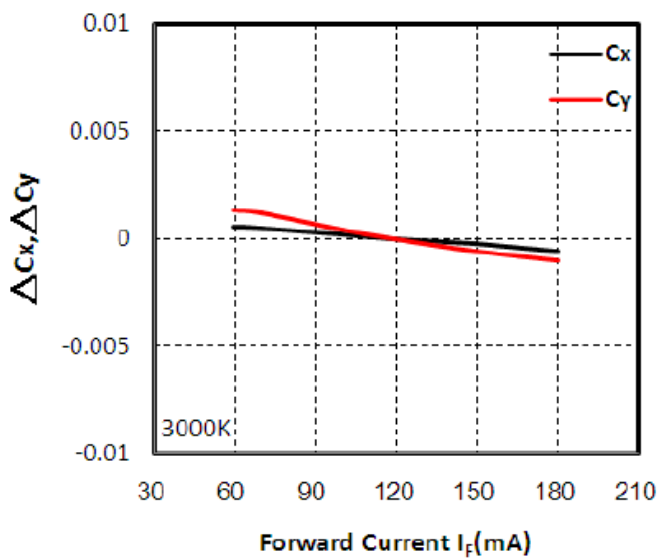

A-BRIGHT A-BRIGHT INDUSTRIAL CO., LTD.
SURFACE MOUNT LED LAMPS

Part Number: 62-217ASW2C2H


Reliability

Item	Condition	Time/Cycle
Steady State Operating Life of Room Temperature	25°C Operating	1000 Hrs
Steady State Operating Life of Low Temperature -40°C	-40°C Operating	1000 Hrs
Steady State Operating Life of High Temperature 60°C	60°C Operating	1000 Hrs
Steady State Operating Life of High Temperature 85°C	85°C Operating	1000 Hrs
Low temperature storage -40°C	-40°C Storage	1000 Hrs
High temperature storage 100°C	100°C Storage	1000 Hrs
Steady State Operating Life of High Humidity Heat 60°C/90%	60°C/90% Operating	1000 Hrs
Steady State Pulse Operating Life Condition	25°C 10Hz duty=1/10 Operating	200 Cycles
Resistance to soldering heat on PCB (JEDEC MSL3)	pre-store@60°C, 60%RH for 52hrs Tslid max.=260 °C 10sec	3 Times
Heat Cycle Test (JEDEC MRC)	25°C ~ 65°C ~ -10°C, 90%RH, 24hr/1cycle	10 Cycles
Thermal shock	-40°C/20min ~5min ~ 100°C/20min	300 Cycles

A-BRIGHT A-BRIGHT INDUSTRIAL CO., LTD. SURFACE MOUNT LED LAMPS




Part Number: 62-217ASW2C2H

Package

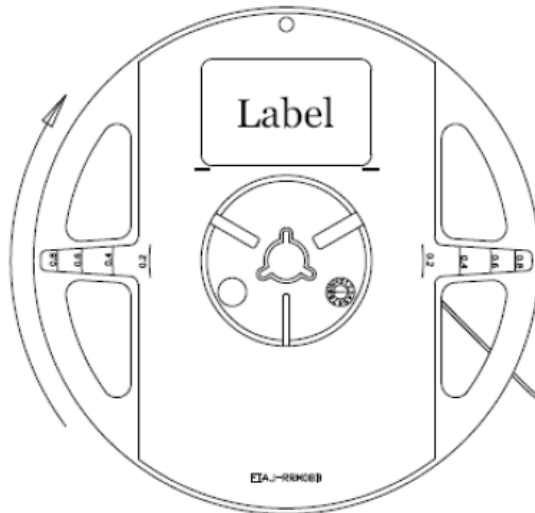

Quantity: 1,000 or 2,000 pcs/reel

Trailer : 400mm · Leader : 200mm

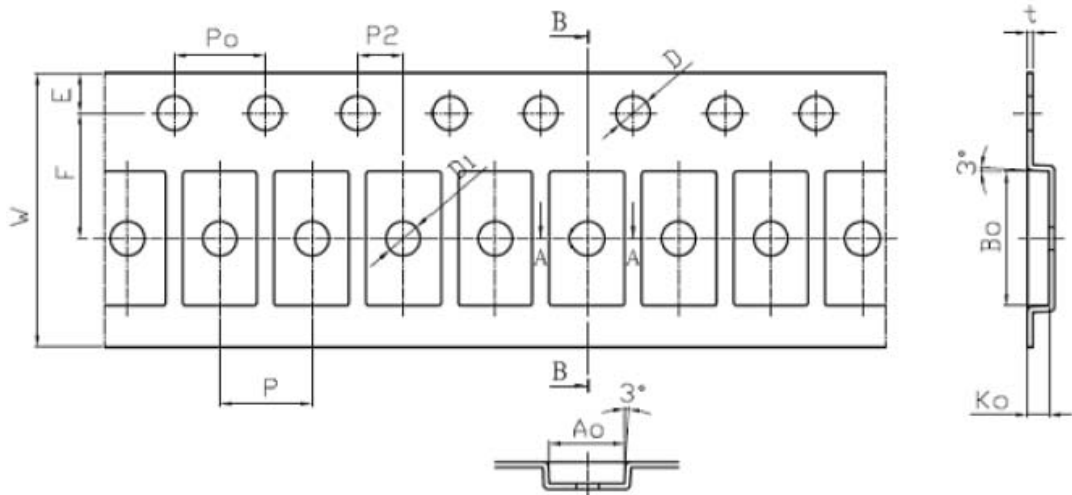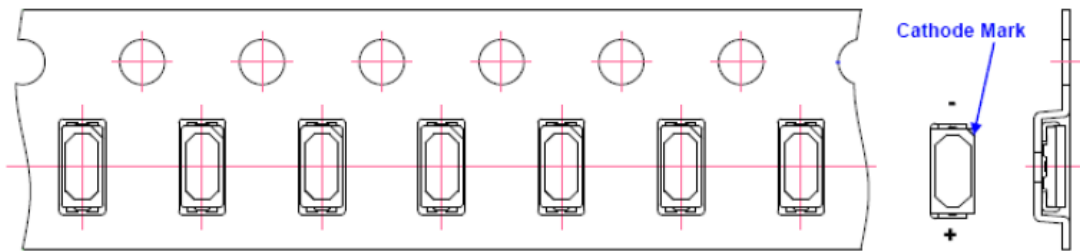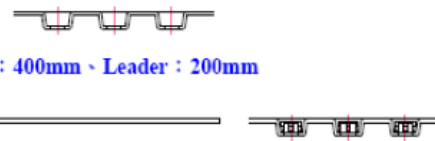

Unit: mm

Item	Spec	To1. (+/-)	Item	Spec	To1. (+/-)
W	12.00	±0.10	P2	2.00	±0.05
E	1.75	±0.10	P0 x 10	40.00	±0.20
F	5.50	±0.05	t1	0.25	±0.05
D	1.50	+0.10, -0.00	A0	3.25	±0.10
D1	1.50	±0.10	B0	5.90	±0.10
P0、P1	4.00	±0.20	K0	0.95	±0.10

A-BRIGHT A-BRIGHT INDUSTRIAL CO., LTD.

SURFACE MOUNT LED LAMPS

Part Number: 62-217ASW2C2H

Precautions For Use

1. Over-current proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

2. Storage

2.1 Do not open moisture proof bag before the products are ready to use.

2.2 Before opening the package, the LEDs should be kept at 30°C or less and 90%RH or less.

2.3 The LEDs should be used within a year.

2.4 After opening the package, the LEDs should be kept at 30°C or less and 70%RH or less.


2.5 The LEDs should be used within 168 hours (7 days) after opening the package.

2.6 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment : 60±5°C for 24 hours.

3. Soldering Condition

3.1 Pb-free solder temperature profile

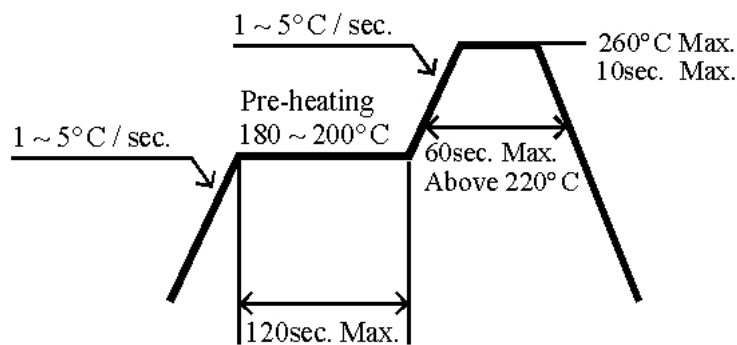

3.2 Reflow soldering should not be done more than two times.

3.3 When soldering, do not put stress on the LEDs during heating.

3.4 After soldering, do not warp the circuit board.

4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 280°C for 3 seconds within once in less than soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.